
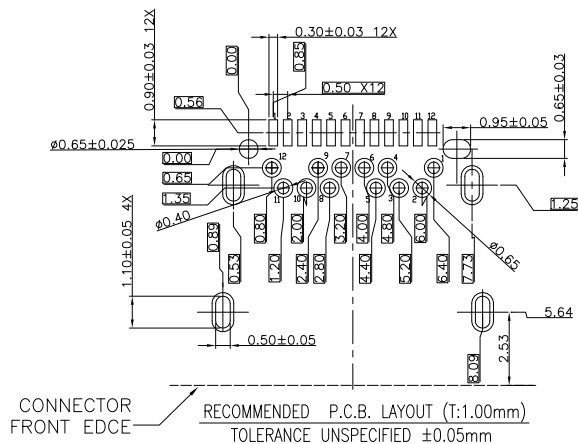


RoHS COMPLIANT



REVISIONS				
REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
1		PROPOSAL DRAWING	Helly Luo	2015-08-27



NOTES:


SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. PART NO.

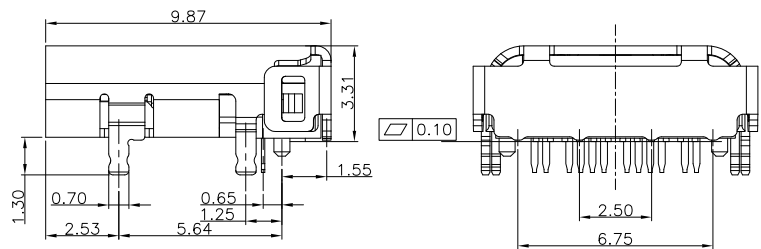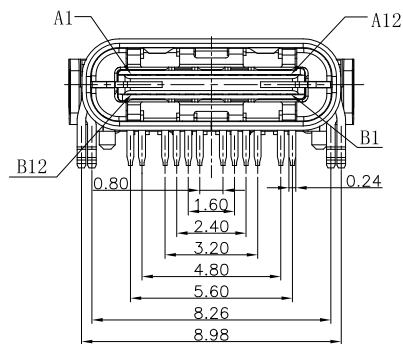


J21194-U412330A1X

Plating :
1 : Gold flash
3 : 5u"
5 : 15u"

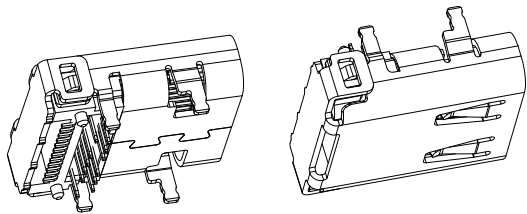

5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SPRING	STAINLESS STEEL	---	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

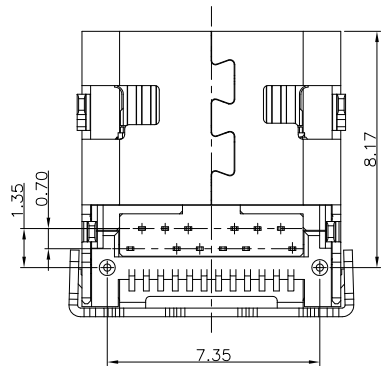

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

DIMENSIONS:

☐ MM [INCH] ☐ INCH [MM] ☒ MM ONLY

UNLESS OTHERWISE SPECIFIED,
GENERAL TOLERANCE:

DECIMALS	ANGLES
X. ±0.45	X° ±5°
.X ±0.35	.X° ±2.0°
.XX ±0.25	

CAD GENERATED DRAWING,
DO NOT MANUALLY UPDATE

THIRD ANGLE PROJECTION



JJP Jen Jia Precision Technology Co., Ltd.

TITLE		USB C F TYPE DIP+SMT CONN			
PART NO.		J21194-U412330A1X	APPROVED BY		JASON MENG
DRAWING NO.		J21194-U412330A1X	CHECKED BY		STEVEN LIU
MATERIAL			DRAWN BY		Helly Luo
FINISH			GENERATD DATE		2015-08-27
SCALE FREE		SHEET 1/1	REV. 1	SIZE: A4 FILE NO.:JJP-A-05-003	

DO NOT SCALE DRAWING