

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO JEN JIA PRECISION TECHNOLOGY CO.,LTD. ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF JEN JIA PRECISION TECHNOLOGY CO.,LTD IS STRICTLY PROHIBITED.

RoHS COMPLIANT

REVISIONS


REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
A		PROPOSAL DRAWING	JASON MENG	2010-12-06

NOTE:

- MATERIAL AND FINISH:
 - HOUSING: PBT UL 94-V0 COLOR: BLACK.
 - CONTACT: BRASS. SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ON TAIL ZONE(RoHS).
 - SWITCH: BRASS. SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ON TAIL ZONE(RoHS).
- READING CONTACT:

POSITION: ACCORDING TO ISO 07816-2 C1-C8.

CONTACT FORCE: 30-50 GRAM.
- CARD INSERTION SPECIFICATION
 - CARD INSERTION DEPTH: 35.5 MM.
 - CARD THICKNESS=0.7-0.8 MM.



CONTACT FINISH OPTION
XX: 0A-G/F Non Lead, 0B-3u"Gold/Non Lead,
0C-5u"Gold/Non Lead, 0D-15u"Gold/Non Lead,
0E-30u"Gold/Non Lead

Normal Close	J191320-XX2W124N	J191320-XX3W124N
Normal Open	J191320-XX2W114N	J191320-XX3W114N
SWITCH CONTACT TYPE	PART NO./SHINE	PART NO./MATTE

DIMENSIONS:

☐ MM [INCH] ☐ INCH [MM] ☒ MM ONLY

UNLESS OTHERWISE SPECIFIED,
GENERAL TOLERANCE:

DECIMALS ANGLES
X. ±0.38 [0.015] X° ±3°
.X ±0.25 [0.010] .X° ±1.0°
.XX ±0.13 [0.005]


CAD GENERATED DRAWING,
DO NOT MANUALLY UPDATE

THIRD ANGLE PROJECTION





JJP Jen Jia Precision Technology Co., Ltd.




TITLE	SMART CARD CONNECTOR H=7.55mm		
PART NO.	J191320-XXXW1X4N	APPROVED BY	JASON MENG
DRAWING NO.	J191320-XXXW1X4N	CHECKED BY	STEVEN LIU
MATERIAL		DRAWN BY	ANNIE WANG
FINISH		GENERATD DATE	2010-12-06
SCALE	1:1	SHEET	1/1
REV.	A	FILE NO.:	JJP-A-05-003

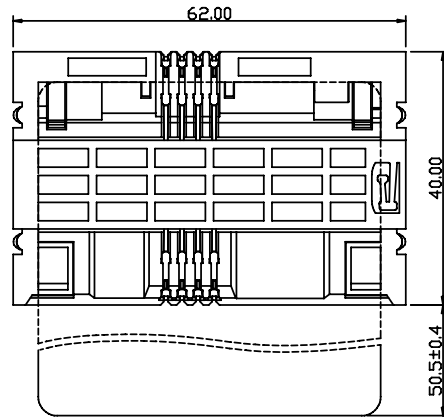

THE LENGTH AFTER INSERT CARD

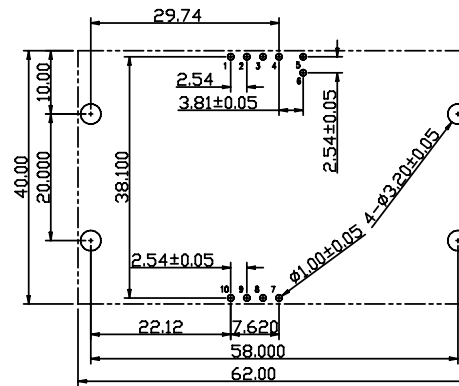

RECOMMENDED P.C.B. LAYOUT
P.C.B THICKNESS=1.60mm

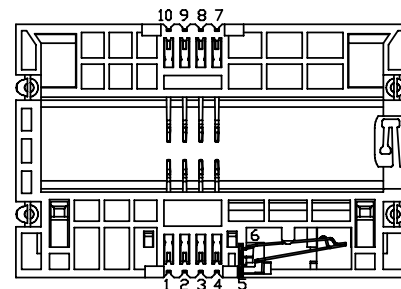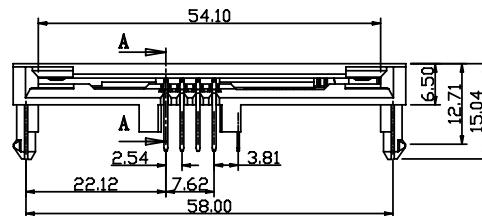

SEC A-A

DO NOT SCALE DRAWING